

INSTALLATION INSTRUCTIONS

SEAT RAIN COVERS

ATTENTION INSTALLER (if other than the owner): Please forward this instruction sheet to the purchaser of this product. These instructions contain valuable information necessary to the end user.

INTRODUCTION: These instructions describe the procedure for properly installing Seat Rain Covers on Drag Specialties and Z1R seats. Review these instructions carefully before beginning, as they contain important information. Please retain them for future reference.

Particularly important information is distinguished in these instructions by the following notations:

NOTE: A **NOTE** provides key information to make the procedures easier or clearer.

CAUTION: A **CAUTION** indicates special procedures that must to be followed to avoid damage to the motorcycle and/or accessories.

WARNING!: A **WARNING** indicates special procedures that must be followed to avoid injury to a motorcycle operator or person inspecting or repairing the motorcycle.

OVERVIEW

These seat covers were developed to extend the life of your seat by keeping it dry and minimizing the exposure to the elements. Covers are available for all styles and seat combinations. All covers are designed to be used with or without driver backrests.

APPLICATIONS

- 0821-1174, fits all Solo front seats with or without backrest.
- 0821-1175, fits all 1-up Predator and Spoon style seats.
- 0821-1176, fits all 2-up Predator or Solo front seats with a passenger seat.
- 0821-1177, fits all dual backrest Touring seats.
- 0822-0156 and 0822-0251, pad and pouch combinations with internal rain cover for Touring seats using the EZ Glide I mechanism.
- 0822-0157, 0822-0252, 0822-0165, 0822-0166 and 0822-0167, pad and pouch combinations with internal rain cover for Touring seats or Solo seats (front and rear) using the EZ Glide II mechanism.

HARDWARE KIT

- 1 - 4' length of 3/32" nylon cord
- 2 - cord locks

NOTE: This is a universal cover, so fitment may vary.

INSTALLATION OF SEAT COVERS (a. THROUGH d.)

NOTE: If you are using a driver or passenger backrest, fold it forward at this time.

1. Position the cover over seat so the LeMans label is toward the rear of the seat. Tuck the cover around the front and rear of the seat while gently pulling down on the sides.
2. Proceed to securing cover.

INSTALLATION OF SEAT COVERS (e. and f.)

1. Fold pad forward so the pouch is facing up. In most cases the bar pad should be pulled up, allowing the pad to fold forward with minimal pressure on the seat.

2. Unzip the pouch and position cover and pad over seat.

NOTE: Make sure the LeMans label faces the rear of the seat. If it faces the front, unsnap the cover from inside the pouch, turn cover so label faces rear and re-snap the cover inside the pouch.

3. Tuck the cover around the front and rear of the seat while gently pulling down on the sides.

SECURING COVER

4. The cover has an elastic loop on each side. Cut the 4' length of the nylon cord into two 2' lengths. Fold a 2' piece in half and thread the two ends through the barrel lock, creating one large loop.

5. Thread the folded end of the cord through the elastic loop and thread the barrel lock end through the cord loop. See **Fig. A**. Repeat this step for the other side.


NOTE: You can change the length by moving the barrel lock.

6. Locate a mounting point on the bike to fasten the loop and secure the cover. Perform this step on both sides. The mounting point may be a foot peg, head of a bolt or part of the frame. **Fig. B**.

WARNING: Do not fasten the cord to hot parts or moving parts.

CAUTION: Do not over-tighten the cord, just remove any slack.

CAUTION: Clean with mild soap and warm water. Always air dry prior to storage.

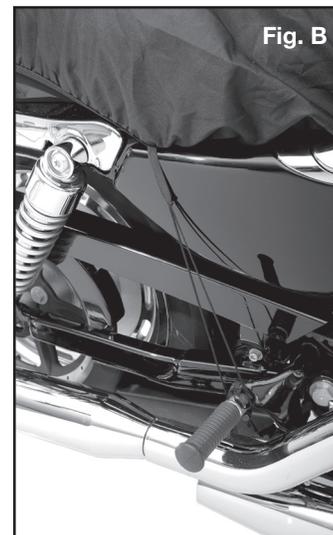

PLEASE READ:

IMPORTANT WARRANTY INFORMATION!

THIS WARRANTY APPLIES ONLY TO THE PRODUCTS MANUFACTURED BY LEMANS SEAT COMPANY.

- A)** LeMans Seat Company warrants that this product is free from defects in materials or workmanship under normal use and service for a term of one year from the date of purchase.
- B)** LeMans Seat Company's sole obligation under this warranty shall be, at its option, to repair or replace this product without charge.
- C)** LeMans Seat Company shall not be liable under this warranty if this product has been misused, abused, altered, repaired without authorization or damaged by exposure to gasoline, brake fluid or harmful solvents.
- D)** This warranty extends only to the original purchaser, and all rights are solely those of the original purchaser and are non-transferable to subsequent owners.
- E)** Proof-of-purchase must accompany any returned products.
- F)** The above warranty is in lieu of any other warranty, whether expressed, implied or statutory including, but not limited to any warranty for fitness of purpose, merchantability, or freedom from infringement or the like, and any warranty otherwise arising out of any proposal, specifications or sample. LeMans Seat Company neither assumes nor authorizes any person to assume for it any other liability.

