

# INSTALLATION INSTRUCTIONS

## DRAG SPECIALTIES TOURING SEATS FOR 1997-2007 FLT, FLHT, FLTR AND 2009-UP FLT, FLHT, FLTR AND FLHX MODELS

**ATTENTION INSTALLER** (if other than owner): Please forward this instruction sheet to the purchaser of this product. These instructions contain valuable information necessary to the end user.

**INTRODUCTION:** These instructions describe the procedure for properly installing Drag Specialties seats onto FL models. Review these instructions carefully before beginning, as they contain important information. Please retain for future reference.

Particularly important information is distinguished in these instructions by the following notations:

**NOTE: A NOTE** provides key information to make procedures easier or clearer.

**CAUTION: A CAUTION** indicates special procedures that must be followed to avoid damage to the motorcycle and/or accessories.

**WARNING!: A WARNING** indicates special procedures that must be followed to avoid injury to a motorcycle operator or person inspecting or repairing the motorcycle.

### OVERVIEW:

Your seat has been designed to be used with Drag Specialties EZ Glide frame mount system, **PART #0822-0163**, and backrest pads **0822-0167** (Solar Reflective leather) and **0822-0166** (Pillow style). This seat can be used with most OEM frame mount and pad assemblies.

### SOLAR REFLECTIVE TECHNOLOGY

Solar Reflective leather keeps the seating area cool, even in direct sunlight. The process has been shown to reduce surface temperatures by as much as 25°F.

**NOTE:** The Solar Reflective Technology is only available on select models. See catalog for specific applications.

**CAUTION:** The use of leather conditioners or chemicals will void warranty.

**Cleanup:** Warm water, mild soap and a soft cloth should be used for cleanup.


**NOTE:** The saddlebags may need to be removed to access and remove the seat hand strap.

### TOOLS REQUIRED:

#2 Phillips screwdriver  
7/16" Open-end wrench (for early models)

### PROCEDURES:

1. Begin by placing the bike on the side stand.

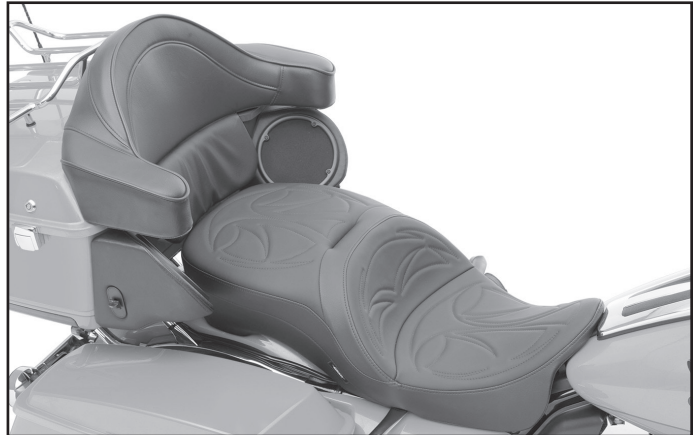

**WARNING!:** Make sure the motorcycle is secure and will not fall while on the side stand.

2. Remove the stock seat from the bike.  
SAVE the rear Phillips-head screw, it will be reused.

**NOTE:** On 2010 and later models, remove the two frame-seat bumper mounts located on the top of the frame (one on each side); these will not be reused. Some models may not be equipped with these bumpers.

**NOTE:** On 1997-2007 FLTR, FLHT and FLHTC models, dash extension (**PART #2202-0070**) has been provided to complete your installation. Install at this time before proceeding to **STEP 3**.

3. Loosen the rear bracket on your new seat so it slides with some resistance. Install the seat, moving the seat firmly forward. Adjust the rear bracket so it lines up with the mount hole in the fender. Remove the seat, and tighten the two screws securing the bracket.

4. Reinstall the seat and attach the rear bracket to the fender, reusing the stock mounting screw.



3501 Kennedy Rd, PO Box 5222, Janesville, WI 53547-5222  
P/N 010394