

INSTALLATION INSTRUCTIONS

DRAG SPECIALTIES SOLO SEATS FOR INDIAN SCOUT MODELS

ATTENTION INSTALLER (if other than owner): Please forward this Instruction Sheet to the purchaser of this product. These instructions contain valuable information necessary to the end user.

INTRODUCTION: These instructions describe the procedure for properly installing Drag seats onto Indian Scout models.

Review these instructions carefully before beginning, as they contain important information. Please retain for future reference.

Particularly important information is distinguished in these instructions by the following notations:

NOTE: A NOTE provides key information to make procedures easier or clearer.

CAUTION: A CAUTION indicates special procedures that must be followed to avoid damage to the motorcycle and/or accessories.

WARNING! A WARNING indicates special procedures that must be followed to avoid injury to a motorcycle operator or person inspecting or repairing the motorcycle.

ABOUT THE SOLAR REFLECTIVE TECHNOLOGY

Solar reflective leather keeps the seating area cool even in direct sunlight. The process has been shown to reduce surface temperatures by as much as 25°F.

NOTE: The Solar Reflective Technology is only available on select models. See catalog for specific applications.

CAUTION: Use of leather conditioner or chemicals will void warranty. Warm water, mild soap and a soft cloth should be used for cleanup.

OVERVIEW:

The solo front seat can be used with the OEM fender rack or the driver backrest with or without the solo rear seat. The solo rear can be used with the OEM solo front or any aftermarket solo front. If using the OEM fender rack or driver backrest, follow the manufacturer's installation instructions.

HARDWARE:

The solo front seat does not require any additional hardware for installation.


CAUTION: Always use care when handling your new seat. Avoid dropping or hitting it against hard surfaces. The perimeter of your new seat was inspected prior to shipping.

REMOVING THE STOCK SEAT:

1. Begin by placing the bike on the side stand.
2. Firmly pull straight up on the front of the seat, releasing the front mounting peg. Slide the seat slightly to the rear while pulling upward.

INSTALLING THE SOLO FRONT SEAT:

3. Holding the seat straight over the bike, align the 1" hole that is 3" from the rear of the seat over the mounting post on the

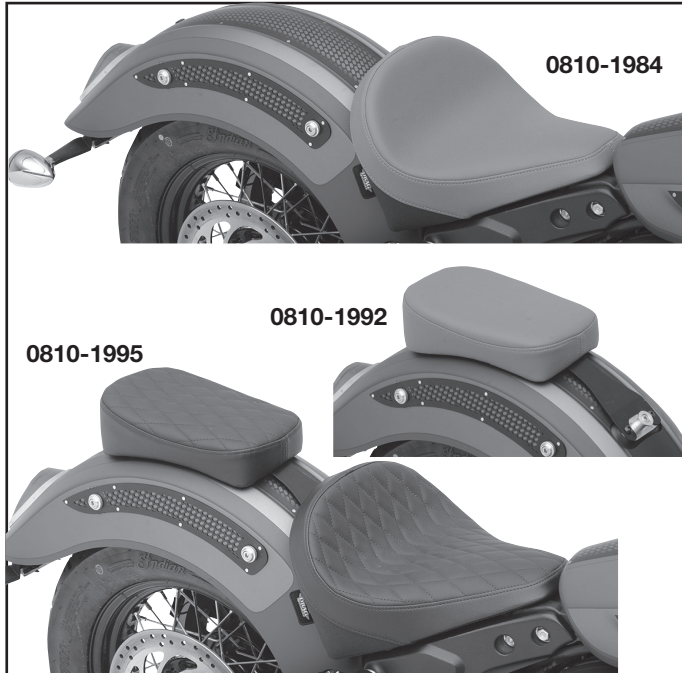

bike. Push the seat down over the post and slide the seat forward. Push the front of the seat down, engaging the front mounting peg.

NOTE: Applying a thin layer of petroleum jelly or equivalent to the front mounting peg may ease the initial installation.

WARNING!: After installation, pull up on the rear of the seat to confirm that the mounting post is engaged into the rear of the seat.

INSTALLING THE SOLO REAR SEAT:

HARDWARE:

The solo rear has the front mount installed and two 8mm screws taped to the front mount. The rear bracket is fastened to the seat with a single 8mm screw taped to the bracket.

4. Remove the solo front seat.
5. Remove the 8mm screw that is taped to the rear mount and the two 8mm screws that are taped to the front mount on the seat.
6. Loosen the rear bracket so it moves with some resistance.
7. Remove the black cap on the fender that covers the rear mounting hole.
8. Position the rear seat onto the bike and start the two 8mm screws through the front bracket. **DO NOT SCREW ALL THE WAY IN AT THIS TIME.**
9. Adjust the rear bracket to align with the mount hole in the fender, then remove the seat and tighten the rear bracket.
10. Re-install the solo rear seat. Start the two 8mm screws in the front bracket and the 8mm screw in the rear bracket that was removed in step 5. Tighten all three screws.
11. Install the front seat as noted in step 3.

