



WINCH MOUNT INSTALLATION INSTRUCTIONS


03-06 Kawasaki KAF Mule 620 4x4
 05-07 Kawasaki Mule 3010 Diesel
 05 Suzuki 620 4x4

PART# 4505-0676

ITEM	QTY.	PART#	DESCRIPTION
1	1	1532-1	Winch Mount Plate
2	4	HDW2051	5/16 x 1 Hex Bolt
3	4	HDW7058	5/16 Nylock Nut
4	4	HDW9002	5/16 Flat Washer
5	2	HDW2050	5/16 x 3/4 Hex Bolt
6	2	HDW9004	5/16 Split Lock Washer

NOTE: This mount is only required for 2-bolt pattern winches.
NOTE: Fairlead is not included with winch mount kit.

1. Remove front bumper. Place winch mount on top of frame as illustrated.
2. Align with the pre-existing four-hole pattern.
3. Attach winch mount using the four 5/16 x 1 hex bolts, washers and nylock nuts.
4. Place winch on top of plate and bolt with the 5/16 x 3/4 hex bolts and lock washers making sure cable spools off the bottom.
5. Attach the fairlead to location on bumper using hardware provided with winch and wire to winch manufacturer's instructions.

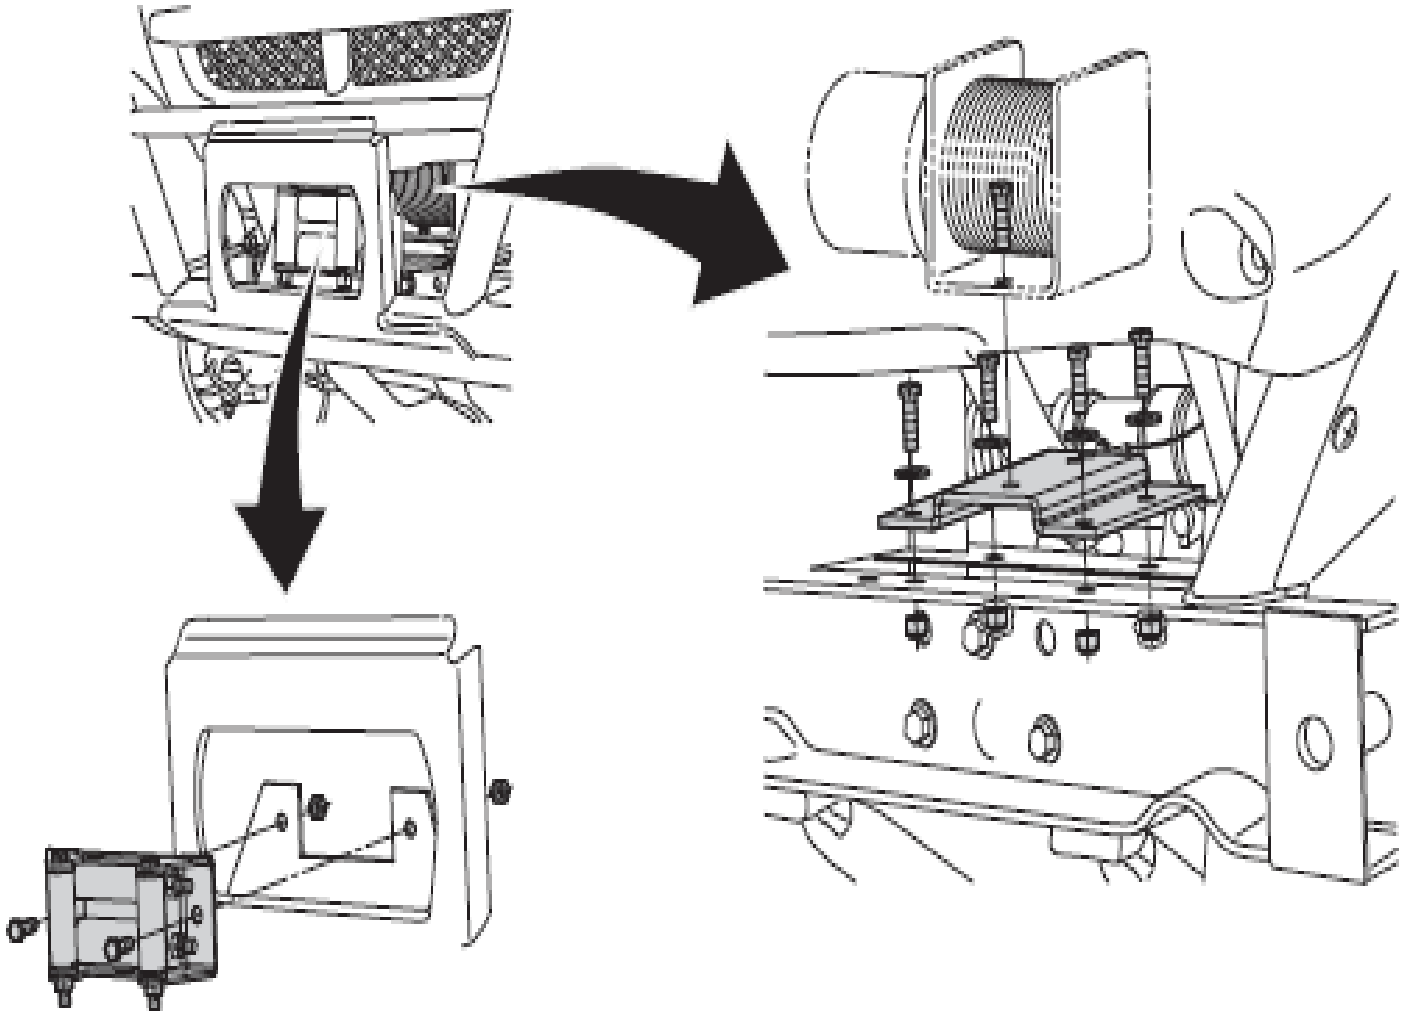

FOR QUESTIONS OR COMMENTS PLEASE CALL: 320-964-1616 (7:00 to 4:30 CST Monday through Thursday).