

INSTALLATION INSTRUCTIONS

D.S.-NESS MIRRORS

P/N'S DS-302150, DS-302152, DS-302154,
DS-302155, DS-302156, DS-302161 & DS-302162

ATTENTION INSTALLER: (if other than owner): Please forward this instruction sheet to the purchaser of this product. These instructions contain valuable information necessary to the end user.

INTRODUCTION: These instructions describe the procedure for properly installing D.S. -Ness Mirrors.

Review instructions carefully before beginning, as they contain important information. Please retain for future reference.

Particularly important information is distinguished in these instructions by the following notations:

NOTE: A NOTE provides key information to make procedures easier or clearer.

CAUTION: (shaded) A CAUTION indicates special procedures that must be followed to avoid damage to the motorcycle and/or accessories.


WARNING: (boxed and shaded) A WARNING indicates special procedures that must be followed to avoid injury to a motorcycle operator or person inspecting or repairing the motorcycle.

TOOLS REQUIRED:

6mm hex key

PROCEDURE:

1. These mirrors may be used for right- or left-hand installations by simply removing the mirror head from one side of the stem and reinstalling it on the opposite side. We suggest using a thread-locking agent on the mirror head threads to avoid possible rotation.
2. To attach mirror with stem to motorcycle, simply select one of the three socket bolts provided. Slide one of the inside star washers on the bolt and place the second star washer between the bottom of the mirror stem and the housing to which the mirror is being mounted. This will help eliminate rotation of the mirror. Position mirror and tighten mounting bolt securely. Note: Thread locking agent may also be used on this bolt if desired.
3. If mirror head loosens up slightly, simply snug up the two screws in the back of the mirror. *Do not overtighten.*

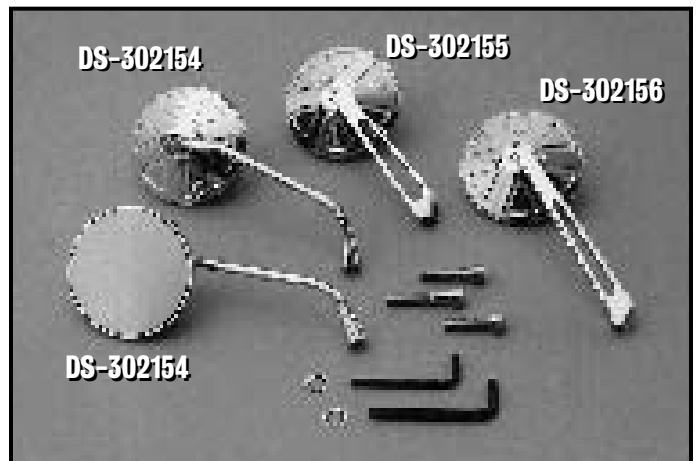

4. Textured or recessed areas may be painted to match bike's color if desired.

NOTE: Replacement mirror glass is available for the following mirrors:

DS-302150 & 52 (Stealth Mirrors) use DS-302151 mirror glass.

DS-302154, 55 & 56 (D.S.-Ness Round Mirrors) use DS-302157 mirror glass.

DS-302161 & 62 (Blue Sapphire Stealth Mirrors) use DS-302164 mirror glass.

DRAG SPECIALTIES

Box 9336, Minneapolis, MN 55440

Printed in Taiwan, R.O.C.