Marine Stereo

4401-0284




KEY FEATURES


- 2.8" TFT display - 320 x 240 resolution
- Four amplified speaker outputs
  32 watts RMS x 4 (Zone 1 & Zone 2)
- Speaker outputs support 2-8Ω loads
- Zone volume control (2 zones and 1 subwoofer)
- Global AM/FM tuner with 24 presets (18 FM, 6 AM)
- Bluetooth audio streaming
- Rear RCA auxiliary input
- USB for 1A charging of devices
- Five-channel RCA audio output (Zone 1 & 2, Subwoofer)
- Dimmable backlit LCD and buttons
- Illumination trigger for automatic day and night switching
- Mounts into 3" diameter gauge opening
- Wired remote control capable (KMRC350)
- Loudness, bass, treble, and balance controls
- Low battery alarm
- Water-resistant front panel (IPX6)
- UV-resistant finishes/materials (ASTM D4329)
- Corrosion-resistant marine grade materials


PARTS UNLIMITED DRAG Specialties
VISIT DEALER.PARTS-UNLIMITED.COM OR
DEALER.DRAGSPECIALTIES.COM FOR DEALER PRICING

Marine Stereo

4401-0284

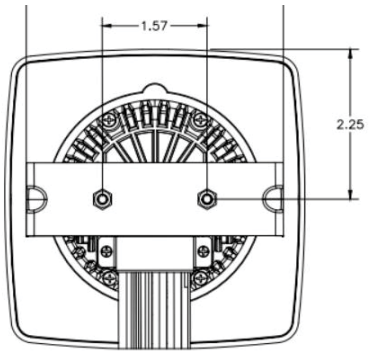

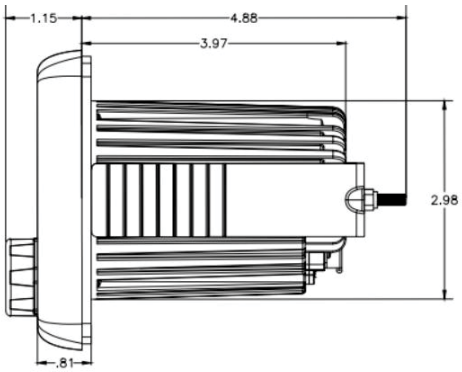

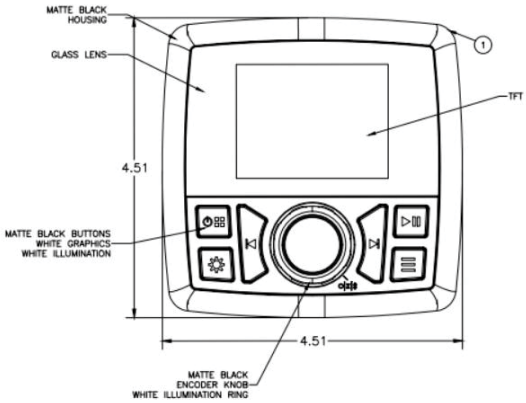

Specifications

General Specifications

Power System		12 VDC	
Operating Voltage Range		10 V to 16V	
Current Draw @ 12V	Standby	70 mA	
	Maximum	16 A	
Fuse Rating		20A ATO	
Operating Temperature Range		-4°F to 149°F	-20°C to 65°C
Storage Temperature Range		-22°F to 158°F	-30°C to 70°C
Overall Dimensions		4.5” H x 4.5” W x 6.0” D	
Mounting Depth		4.9”	
Cutout Diameter		3.0”	
Product Weight (unpackaged)		1.8 lbs.	
Applied Test Suite		ASA ES0001	
Regulatory Certifications		FCC Part 15; CE; UKCA; RoHS	

Performance Specifications

FM Sensitivity		6 µV
AM Sensitivity		32 µV
Output Power	4Ω RMS	24 W RMS x 4
	2Ω RMS	34 W RMS x 4
	2Ω Maximum	64W x 4
Speaker Impedance Compatibility		2Ω minimum
RCA Lineout Level		2 V RMS

Features and specifications subject to change without notice.

PARTS UNLIMITED DRAG Specialties
VISIT DEALER.PARTS-UNLIMITED.COM OR DEALER.DRAGSPECIALTIES.COM FOR DEALER PRICING