Marine Digital Receiver

4401-0285




KEY FEATURES

- 2.8" white backlit segmented LCD with illumination control
- Bluetooth audio streaming (A2DP and AVRCP)
- AM/FM tuner (US/EURO)
- 4-channel amplified audio outputs - 16W RMS x 4; 45W max x 4
- Water-resistant front panel (IPx6)
- Mounts into 3" diameter gauge opening
- UV-resistant (ASTM D4329)
- Corrosion-resistant

PARTS UNLIMITED DRAG Specialties
VISIT DEALER.PARTS-UNLIMITED.COM OR
DEALER.DRAGSPECIALTIES.COM FOR DEALER PRICING

Marine Digital Receiver

4401-0285

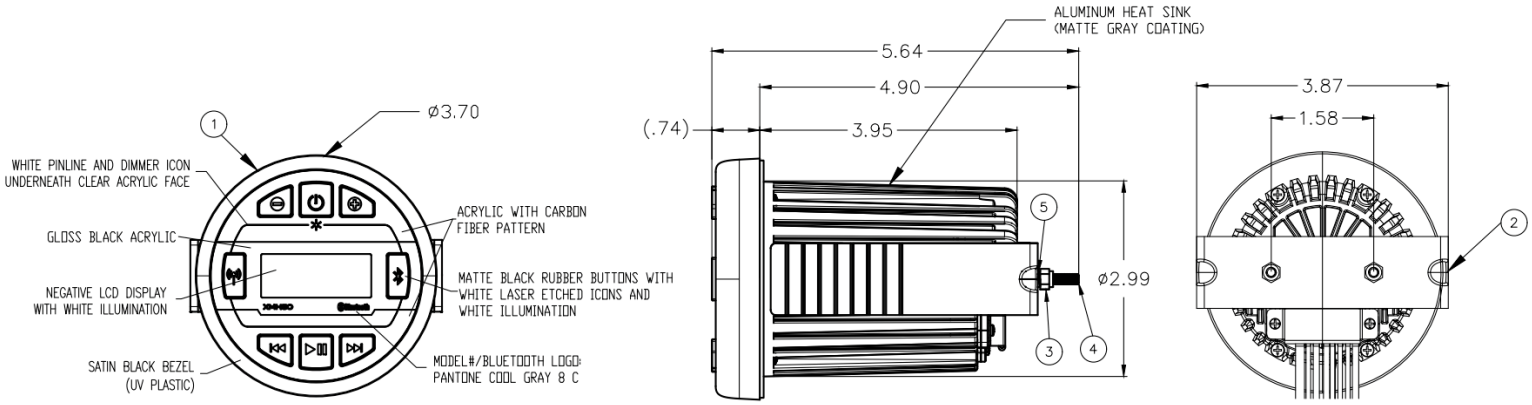

Specifications

General Specifications

Power System		12 VDC
Operating Voltage Range		10 V to 16V
Current Draw @ 12V	Standby	<10 mA
	Maximum	10 A
Fuse Rating		15A ATO
Operating Temperature Range		-4°F to 149°F / -20°C to 65°C
Storage Temperature Range		-22°F to 158°F / -30°C to 70°C
Overall Dimensions (including hardware)		3.7” H x 3.9” W x 5.6” D
Mounting Depth		4.9”
Cutout Diameter		3.0”
Product Weight (unpackaged)		1.95 lbs.
Applied Test Suite		ASA ES0001
Regulatory Certifications		FCC Part 15; CE-RED; TELEC; IC-ID; RoHS

Performance Specifications

FM Sensitivity		<5µV
AM Sensitivity		<18µV
Output Power	RMS	21 W x 4
	Maximum	45 W x 4
Speaker Impedance Compatibility		4Ω minimum

Features and specifications subject to change without notice.

PARTS UNLIMITED DRAG Specialties
VISIT DEALER.PARTS-UNLIMITED.COM OR DEALER.DRAGSPECIALTIES.COM FOR DEALER PRICING